





NOTES:

Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)


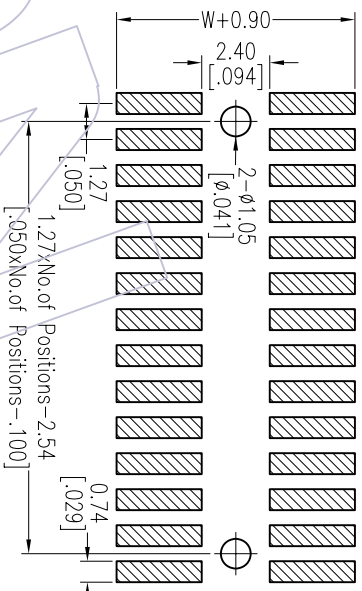
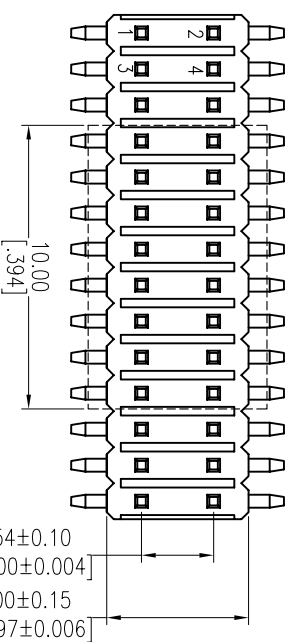


Ordering Information

1425-22 XX XX M XXX X X

No. of Pins Contact Plating Pin Length Series No.
 Per Row:02-50 G=Gold Flash L=B+C+D+W₂S4 1=Type 1
 G3=10u"Gold Standard: 2=Type 2
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Packing
 T=Tube
 P=Tube+CAP
 R=Tray&Reel+CAP

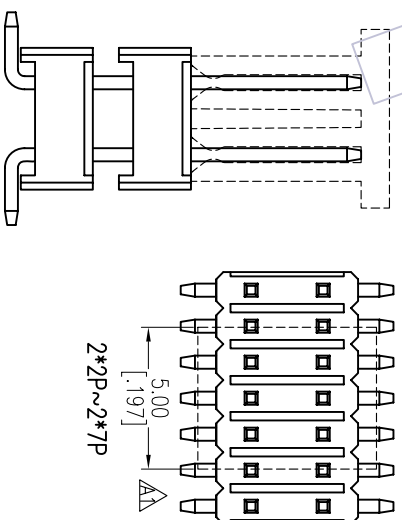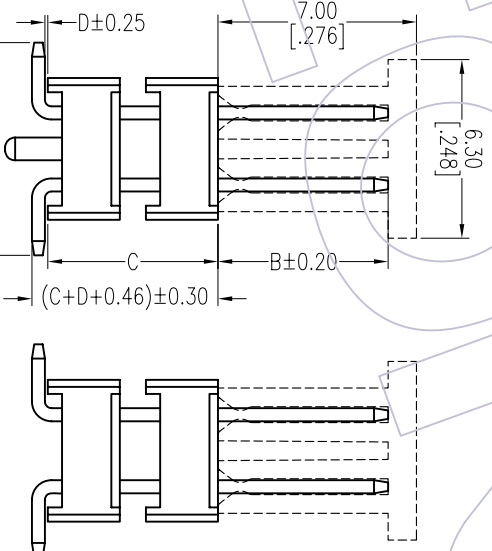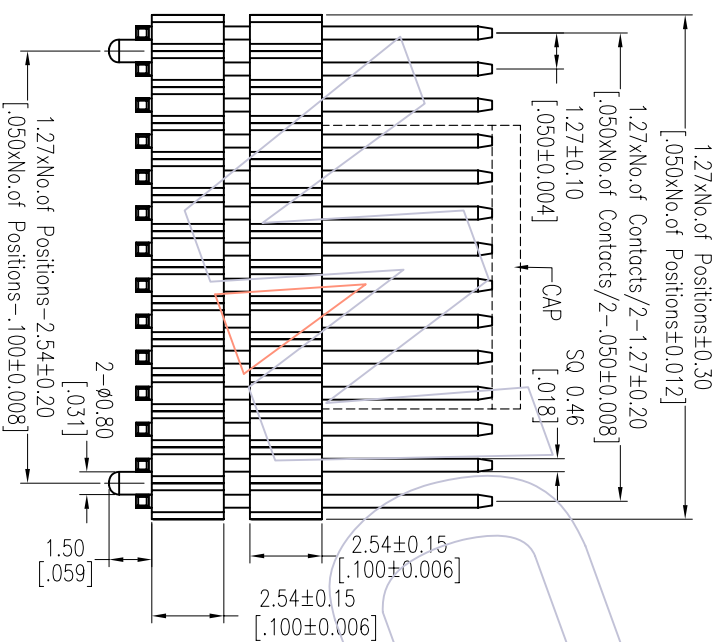

Item	Pin Length	W	D	B	C	Mating
Standard	---	7.50	0.10	2.80	---	2446
Alternate	---	7.50	0.10	6.00	---	2485

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A1	2012/09/20	Modify Drawing	---	XX	William Diao	2012.09.20	UNIT	mm	1425-22XXXXMXXXXX	PH1. 27*2.54 DUAL ROW DOUBLE PLASTIC SMT H=2.54	
A0	2012/04/06	NEW	---	X.XXX	CHECK	DATE	SIZE	A4			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	ANGLE	APPROVE	DATE	SHEET	1/1			
				± 3'	PROJ.						



Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 512 57468408
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com