

NOTES:

- Current Rating: 1AMP
- Contact Resistance: 20mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au or Sn over Ni
- Insulator Material: PBT+30%GF (UL94V-0)


Ordering Information

6310-068 S S S4 M N A 01

No. of Pins
68Pin

Contact Plating
S4=15u"Gold/Tm
S5=30u"Gold/Tm

Packaging
A=Tray

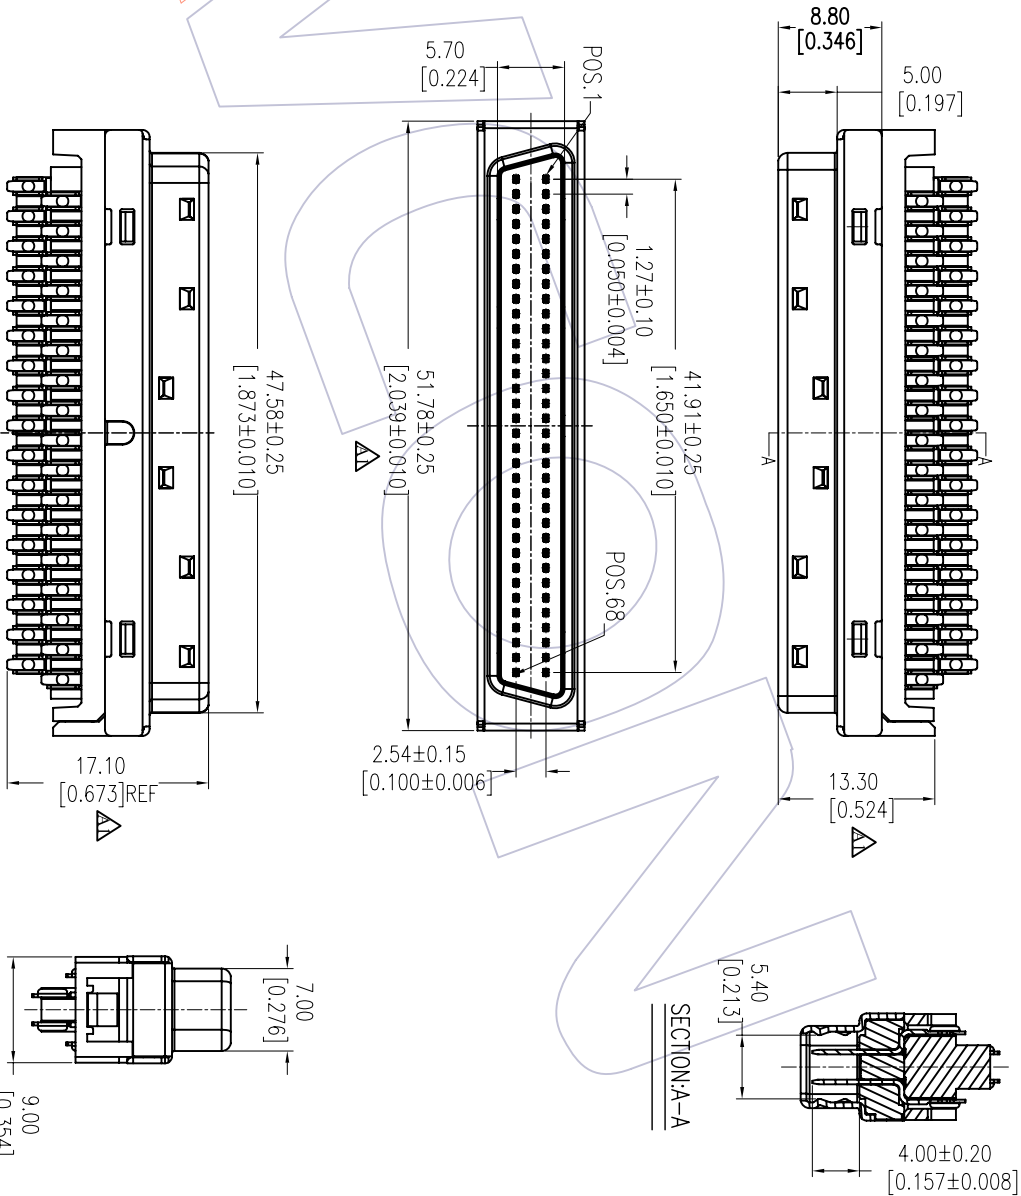

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2012/04/19	MODIFY		X.XX ±0.40	TANG	2012/04/19	mm A4	inch	6310-068SSSXMNA01	1.27x2.54 SCSI 68P Male	Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2012/03/19	NEW		X.XXX ±0.25	CHECK		A4	1/1		Soldering Type	Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle ± 3°	APPROVE					Customer NO.	E-mail: sales@wcon.com	E-mail: sales@wcon.com
				DIM TOL								



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com